

Fig.1

```

GetArgument ::= SEQUENCE {
    baseManagedObjectClass
    baseManagedObjectInstance
}
BaseManagedObjectClass ::= CHOICE {
    globalForm
    localForm
}

```

BaseManagedObjectClass
GraphicString
OBJECT IDENTIFIER
INTEGER

Fig.2

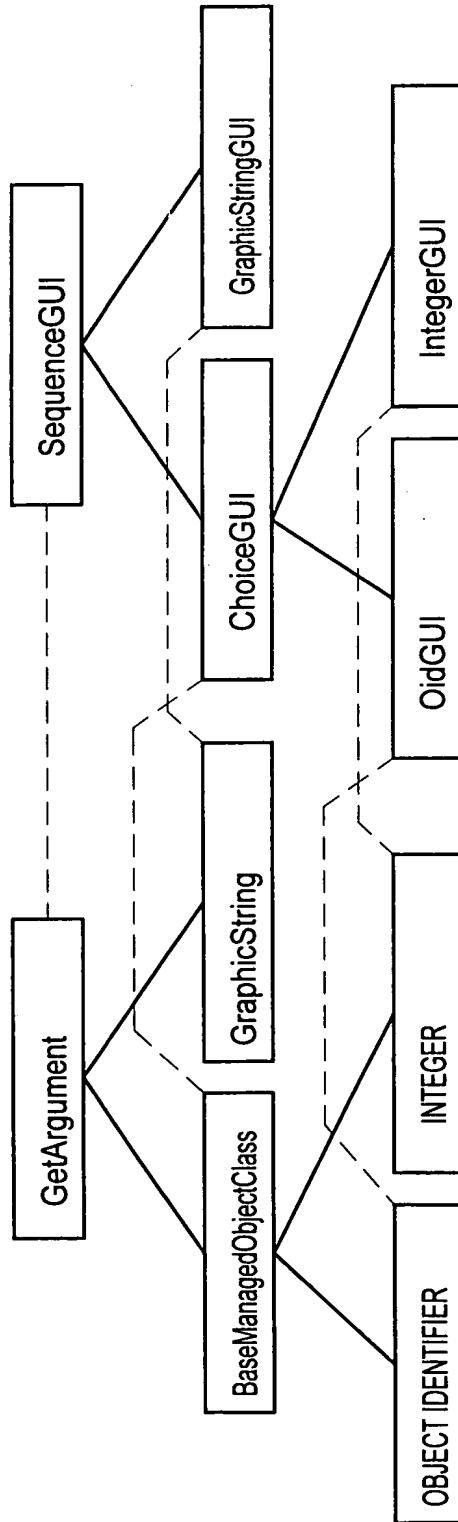


Fig.3